


# 8-Port Gigabit Easy Smart Switch with 4-Port PoE

MODEL: TL-SG108PE Datasheet

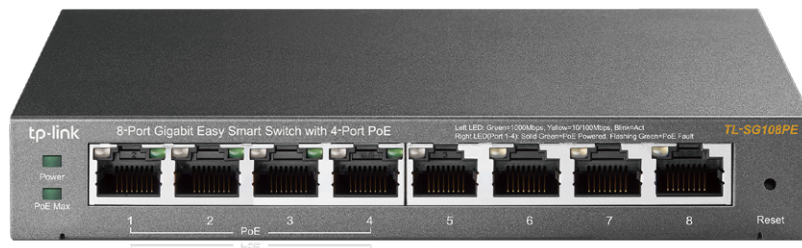

## Overview

The TL-SG108PE is an 8-port Gigabit Easy Smart Switch with 4 PoE ports, represents a powerful upgrade from an unmanaged switch. It is designed specifically for small businesses that require simple network management and PoE function. The TL-SG108PE can connect and power up to four PoE devices, such as wireless access points (APs), IP cameras, and IP phones. Through its web-based user interface and management utility, the TL-SG108PE offers a variety of useful features, including network monitoring, traffic prioritization, and enhanced QoS. Additionally, with port-based, tag-based and MTU VLAN, TL-SG108PE can improve security and meet more network segmentation requirements.

## Power Over Ethernet

4 of the 8 Auto-Negotiation RJ45 ports (port 1 to port 4) of the switch support Power over Ethernet (PoE) function. These PoE ports can automatically detect and supply power with those IEEE 802.3af compliant Powered Devices (PDs).

## Overload Arrangement

TL-SG108PE has the priority function which will help protect the system when the system power is overloaded. If all PoE PDs power consumption is  $\geq 55W$ , a priority will be arranged among the PoE ports, then the system will cut off the power of the lowest-priority port.

## Port Priority Function

Priority (port 1>port 2>port 3>port 4): This function will help protect the system if the system power becomes overloaded. For example, Port 1, 2, and 4 are using 15.4w (maximum power per port is 15.4W), the system power is 46.2w in total (PoE max LED will be red if all PoE PDs power consumption is  $\geq 46W$ ). If there is an additional PD inserted to Port 3 with 10w then the system will cut off Port 4 to protect the system, this means Port 1, 2 will use 30w, and Port 3 will use 10w, and no power will be supplied to Port 4.

## Effective Management


TL-SG108PE offers network monitoring for users to observe traffic behavior. Through its web-based user interface and management utility, the TL-SG108PE offers a variety of useful features, including network monitoring, traffic prioritization, and enhanced QoS. With Port Mirroring, Loop Prevention and Cable Diagnostics features, TL-SG108PE can identify and even locate connection problems on your business network. Moreover, administrators can designate the priority of the traffic based on Port Priority, 802.1P Priority and DSCP Priority, to ensure that voice and video are always clear, smooth and lag-free. Additionally, to improve security and network performance, TL-SG108PE supports MTU VLAN, port-based VLAN and 802.1Q-based VLAN functions. TL-SG108PE is an upgrade from the plug-and-play Unmanaged Switch, delivering great value while empowering your network and similarly delivering great value to the end user.

## Easy to Use

TL-SG108PE is easy to use and manage. Auto MDI/MDI-X crossover on all ports eliminate the need for crossover cables or uplink ports. Auto-negotiation on each port senses the link speed of a network device (either 10, 100, or 1000 Mbps) and intelligently adjusts for compatibility and optimal performance. Its compact size makes it ideal for desktops with limited space. Dynamic LED lights provide real-time work status display and basic fault diagnosis.

# Specifications

## Hardware Features & Performance

|                   |  |   |
|-------------------|--|---|
| Product Picture   |  |  |
| Model             |  | TL-SG108PE  |
| Physical Features | Interface  | 8 10/100/1000Mbps RJ45 Ports  |
|                   | PoE Standard   | 802.3af   |
|                   | PoE Ports  | Port 1~ Port 4, up to 15.4W per port  |
|                   | PoE Power Budget   | 55W   |
|                   | External Power Supply  | External Power Adapter(output: 48VDC/1.25A)                                       |
|                   | Max Power Consumption  | 5.15W (220V/50Hz. no PD connected)<br>65.18W (220V/50Hz. with 55W PD connected)   |
|                   | Max Heat Dissipation   | 17.57 BTU/h (no PD connected)<br>222.39 BTU/h (with 55W PD connected)             |
|                   | Fan Quantity   | Fanless   |
|                   | LED  | Power, PoE Max, Speed/Link/Act, PoE Status (Port 1~Port 4)                        |
|                   | Certification  | CE, FCC   |
|                   | Dimensions   | 6.2 * 4.0 * 1.0 in. (158 * 101 * 25 mm)   |
| Environment       | Operating Temperature: 0°C~40°C (32°F~104°F)<br>Storage Temperature: -40°C~70°C (-40°F~158°F)<br>Operating Humidity: 10% ~ 90%RH, non-condensing<br>Storage Humidity: 5%~95%RH, non-condensing |   |
| Performance       | Switching Capacity   | 16Gbps  |
|                   | Forwarding Rate  | 11.9Mpps  |
|                   | MAC Address Table  | 4K  |
|                   | Packet Buffer Memory   | 1.5Mb   |
|                   | Jumbo Frame  | 15KB  |

# Specifications

## Software Features

|                          |  |
|--------------------------|--|
| L2 Switching Features    | <ul style="list-style-type: none"> <li>• IGMP Snooping               <ul style="list-style-type: none"> <li>- IGMP Snooping</li> <li>- Supports 128 Groups</li> </ul> </li> <li>• Link Aggregation               <ul style="list-style-type: none"> <li>- Supports static link aggregation</li> <li>- Supports up to 4 aggregation groups, containing 4 ports per group</li> </ul> </li> <li>• Port Mirroring               <ul style="list-style-type: none"> <li>- One to One</li> <li>- Many to One</li> </ul> </li> <li>• Cable Test</li> <li>• Loop Prevention</li> </ul> |
| VLAN                     | <ul style="list-style-type: none"> <li>• Supports up to 32 VLANs (out of 4K VLAN IDs)</li> <li>• MTU/Port/802.1Q VLAN</li> </ul>   |
| Quality of Service (QoS) | <ul style="list-style-type: none"> <li>• Support Port-based/802.1p/DSCP priority</li> <li>• Support 4 priority queues</li> <li>• Rate Limit</li> <li>• Storm Control</li> </ul>  |
| Management               | <ul style="list-style-type: none"> <li>• Web-based Graphic User Interface (GUI)</li> <li>• Easy Smart Conguration Utility               <ul style="list-style-type: none"> <li>- Central Management</li> <li>- Friendly user interface</li> </ul> </li> </ul>  |
| Ethernet Protocols       | <ul style="list-style-type: none"> <li>• IEEE 802.3i 10BASE-T</li> <li>• IEEE 802.3u 100BASE-TX/FX</li> <li>• IEEE 802.3ab 1000BASE-T</li> <li>• IEEE 802.3x Flow Control</li> <li>• IEEE 802.1q VLANs/VLAN tagging</li> <li>• IEEE 802.1p QoS</li> </ul>  |

# Ordering Information

|               |  |
|---------------|--|
| Host Switch   |  |
| Product Model | Description  |
| TL-SG108PE    | 8-Port Gigabit Easy Smart Switch with 4-Port PoE   |
| Router        |  |
| Product Model | Description  |
| TL-ER604W     | SafeStream Wireless N Gigabit Broadband VPN Router |

[www.tp-link.com](http://www.tp-link.com)

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2016 TP-Link Technologies Co., Ltd. All rights reserved.